

Magnet drive rotary vane pump-motor units TMFR 30-200 series

The TMFR series, an integrated pump-motor unit where the motor has no moving parts, features a combination of compact size, superior performance, low energy consumption and silent operation to provide great versatility in a refined, high tech design.

The internal magnet, driven through an electromagnetic field, is capable of transmitting high torque to the shaft.

The speed control system allows the unit to self-adapt to the hydraulic conditions of the circuit to maintain a set pressure or flow rate, while the brushless technology provides a reliable and long lasting operation.

- Compact size
- Motor housing in aluminum
- No wear on the motor
- Black anodized finishing available
- Continuous speed control
- Continuous duty



MAIN APPLICATIONS


- Laser cooling
- Solar heating systems
- Refrigerating gas transfer
- Reverse osmosis
- Welding
- Fuel burner
- Water repressurization
- Post mix systems
- Espresso coffee machines



TECHNICAL INFORMATION

| | | | |
|-------------------------------|--------------------------|----------------------------|---------------------------|
| Pump housing material | Brass or stainless steel | Max. operative temperature | 70 °C (158 F) |
| Pumping chamber | Carbon graphite | Motor type | 100-110-230 V AC 50/60 Hz |
| Ports | 3/8" GAS or NPT | Speed range | 1100 to 3500 rpm |
| Max static pressure | 20 bar/290 psi | Absorbed power | max 330 W |
| Noise | 46dB (A) at 1500 rpm | Actual power | max 250 W |
| Unit weight (w/o controller*) | 2.7 kg (5.9 Lb) | Motor IP protection | IP 20 |


* Controller weight: 700 g (1,5 Lb).

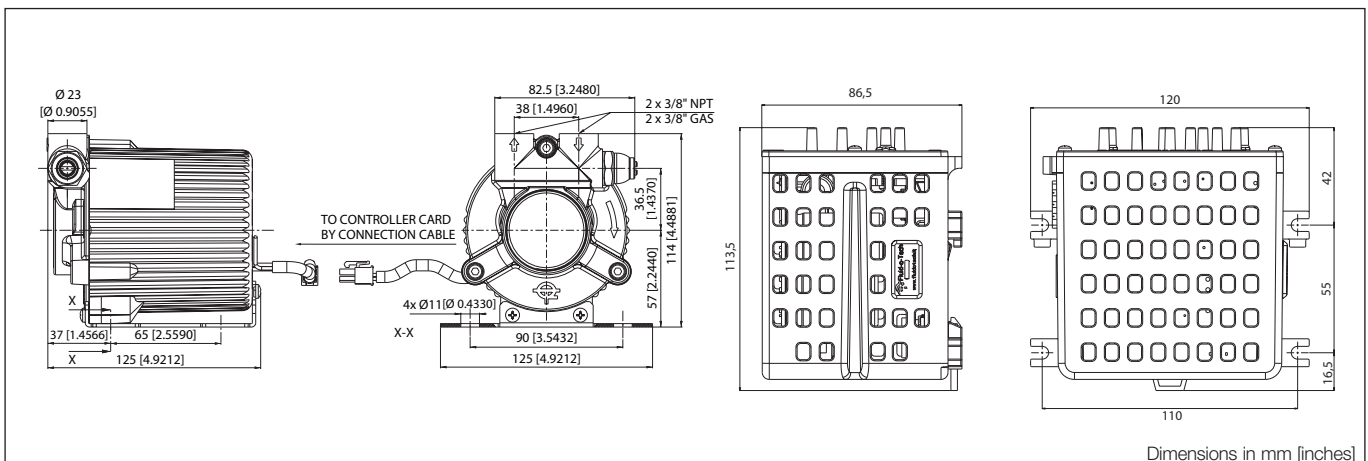

Magnet drive rotary vane pump-motor units TMFR 30-200 series

| TMFROT (BRASS) | 050 | 051 | 054 | 070 | 071 | 074 | 100 | 101 | 104 | 150 | 151 | 154 | 200 | 201 | 204 |
|----------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Figure | A-A | | | B-B | | | C-C | | | D-D | | | E-E | | |
| Relief valve | NO | STD | BAL | NO | STD | BAL | NO | STD | BAL | NO | STD | BAL | NO | STD | BAL |

| TMFRSS (STAINLESS STEEL) | 050 | 051 | 070 | 071 | 100 | 101 | 150 | 151 | 200 | 201 |
|--------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Figure | A-A | | B-B | | C-C | | D-D | | E-E | |
| Relief valve | NO | STD | NO | STD | NO | STD | NO | STD | NO | STD |

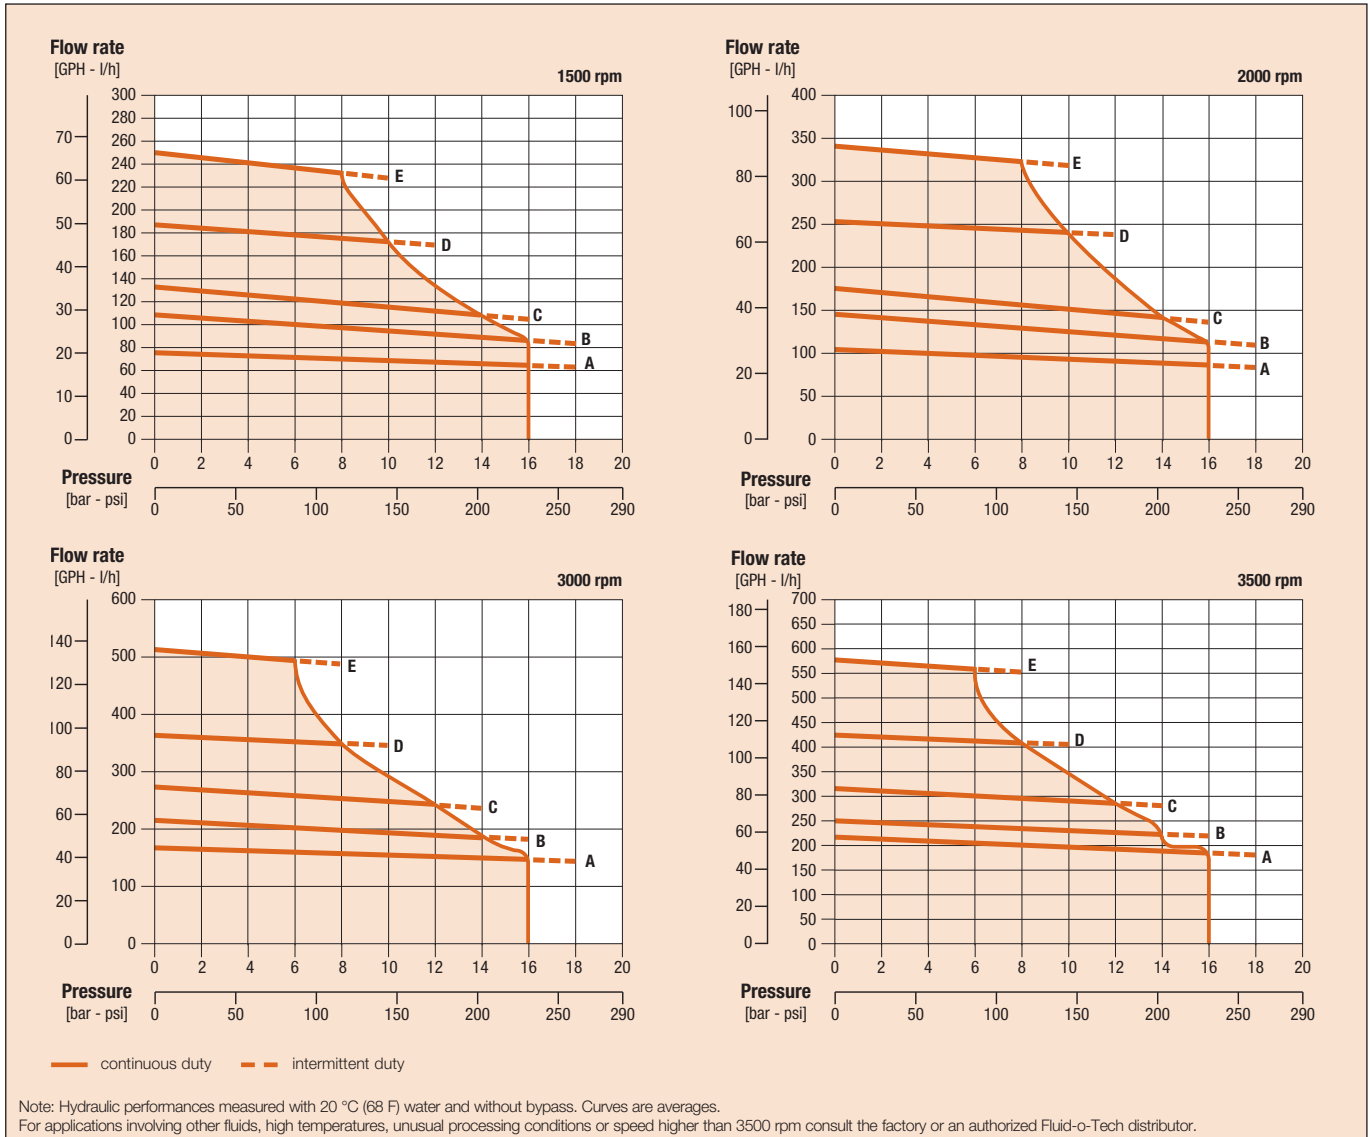

Fluid-o-Tech reserves the right to alter the specifications indicated in this catalogue at any time and without prior notice.

Fluid-o-Tech srl
Via Leonardo da Vinci, 40
20094 Corsico, Milano, Italy
Tel. +39 02 9995 01
Fax +39 02 9995 0999
info@fluidotech.it

Fluid-o-Tech Int'l Inc.
161 Atwater St.,
06479 Plantsville CT (USA)
Tel. +1 (860) 276 9270
Fax +1 (860) 620 0193
info@fluid-o-tech.com

Fluid-o-Tech Int'l Inc. Japan
201, 4-3-10, Todoroki,
Setagaya, Tokyo 158-082, Japan
Tel. +81 (0) (3) 6432 1812
Fax +81 (0) (3) 6432 1813
erkkato@fluidotech.jp

Fluid-o-Tech Asia (Shanghai) Co., Ltd.
2/F, Factory building 6 (1), No. 258, Zhijiang Road,
Fengxian District, Shanghai City, Z.P.: 201499 China
Tel. +86 (021) 67100 838
Fax +86 (021) 67100 605
info@fluidotech-asia.com